

## Integrated Remote Management for Bio-processing Experiments

Ali Givmanesh, Rupa Iyer, Driss Benhaddou  
University of Houston

[agivmanesh@uh.edu](mailto:agivmanesh@uh.edu), [riyer@central.uh.edu](mailto:riyer@central.uh.edu), [dbenhadd@central.uh.edu](mailto:dbenhadd@central.uh.edu)

### Abstract

Biochemical engineering researchers have used bioreactors as the primary fermentation device to grow and analyze various cells and tissues in the context of cell culture experiments. The University of Houston biotechnology program currently uses the New Brunswick Scientific BioFlo 110 to grow transformed bacterial cells in two of its laboratory courses: BTEC 4301: Principles of Bio-processing Laboratory and BTEC 4350: Capstone Experience in Biotechnology. This paper details a theoretical study of the BioFlo 110 primary control unit and proposes a technique to enhance the functionality of the bioreactors as an educational tool by integrating remote monitoring capabilities. The software features presented in this research allow lab instructors and students to remotely view their experiment parameters and settings, therefore reducing the overall time spent in the laboratory and providing an additional layer of flexibility to the overall system.

### Introduction

The BioFlo 110 is a modular fermentation structure for microbial and cell culture applications [1], which provides its users with a highly controlled environment to perform specific experiments. Modern techniques have inspired the development of genetically altered cells that create both new products or large quantities of scarce products including antibiotics, antigens, and enzymes [2]. In order to provide such an environment, the bioreactor's primary unit monitors and controls the following parameters in each of the bioreactor vessels: temperature, agitation, pH value,  $dO_2$ ,  $O_2$ , gas value, in addition to three separate pump units. Although the equipment within the University of Houston laboratory is fairly new, the technology available to improve their capabilities already supersedes them.

Currently, students and instructors rely on live-feed information presented by the bioreactors unit itself. Unfortunately, the unit does not provide a method for archiving data related to the experiment, and is limited to a one-time viewing of information. In situations where experiments are running overnight, any unexpected changes will remain undetected and unrecorded. The main idea of this study is to develop a system that uses web services and networking techniques to design a monitoring tool, which can be used to view the bioreactor's parameters remotely over the Internet.

The initial research focused on understanding and deciphering the standard of communication used between a desktop computer and the primary control unit of the bioreactor. Once complete, the next phase of the project was to introduce and implement a method of remote monitoring that would allow students and instructors to view their appropriate experimental information on a dedicated website. This paper is organized first by an overview and explanation of the overall bioreactor system, followed by both the hardware and system requirements. Afterward is a review of the new developed application design. The research concludes with an overview of the remote management web interface and its related functionalities.

## **System Overview**

Producing new cell products requires lab instructors to perform small-scale experiments to test their procedures and chemical reagents. These initial tests have to be accurate, well-documented, and validated in order to reproduce successful results in larger quantities. The validation process uses the experimental results as proof that a particular process can consistently produce a product of the required quality, purity, and character, and that the bioreactors performance is acceptable during the production operation [2]. The system presented in this research aids in providing supplementary documents to help streamline the validation process and reduce the amount of time spent needed to record the necessary data.

A typical configuration of the BioFlo 110 module currently in use is depicted in Figure 1. The Primary Control Unit (PCU) acts as the operator interface that controls various parameters in each bioreactor growth chamber, and its functionality is similar to thermostats used to control air conditioning units found in many homes. Its main function is to set the operating point for each available parameter and manage the functions necessary to maintain the current value close to the operating point. The other control modules perform the assigned tasks by the PCU to achieve this goal. Lab instructors and students use the PCU's display screen and touch pad to view and control various parameters in each bioreactor vessel. An example of the display screen and parameters are shown in Figure 2. The first and second column on the PCU screen displays the name of each parameter, along with the current values being read in the bioreactor. The third and fourth columns depict the set points and control options defined by the user. These values are chosen based on the experimental description and requirements. Set points are environmental values chosen by the user that are controlled and maintained in the bioreactor vessel based on their control option.

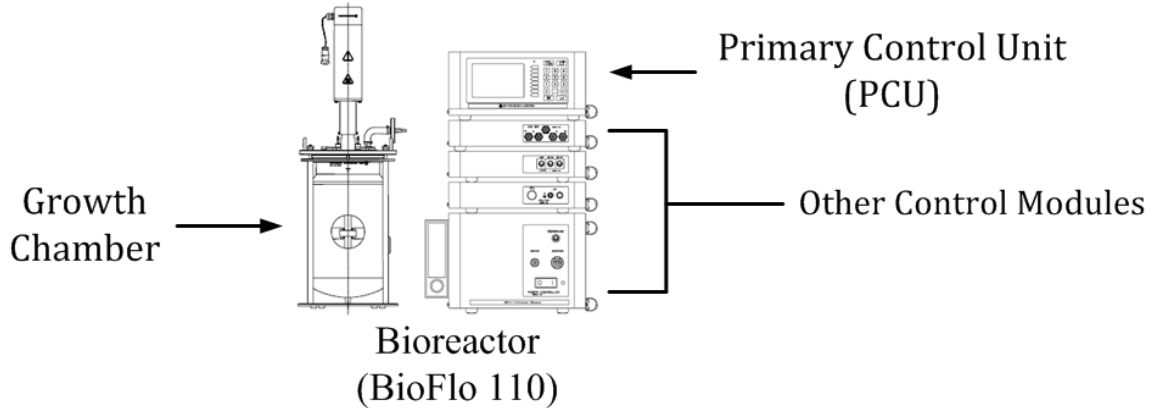


Figure 1: Bioreactor Setup [1]

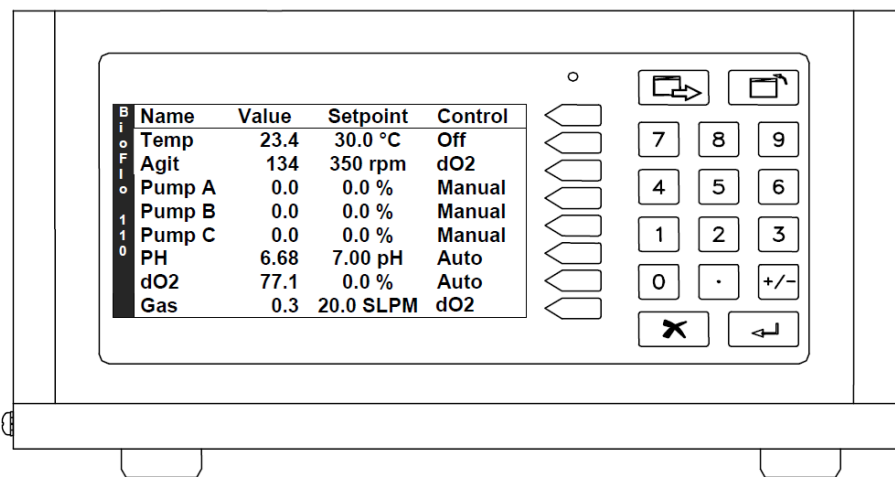


Figure 2: PCU and Bioreactor's Parameters [1]

Figure 3 represents the architecture of the overall bioreactor system and communication method between each component. An alternative solution to access the PCU parameters is through a serial connection between the desktop and the bioreactor, which is setup and maintained by the newly proposed application in this paper. The desktop utilizes a pre-defined set of commands to capture and store the bioreactor information into text files on its hard drive. The application converts the stored data into a unique format and transfers the new files through the University of Houston network to a web server housed in the College of Technology. Every time users connect to the bioreactor website, the server dynamically updates the web page contents, and presents the users with a live view of the experimental data. The next section explains the hardware and software requirements within the proposed architecture.

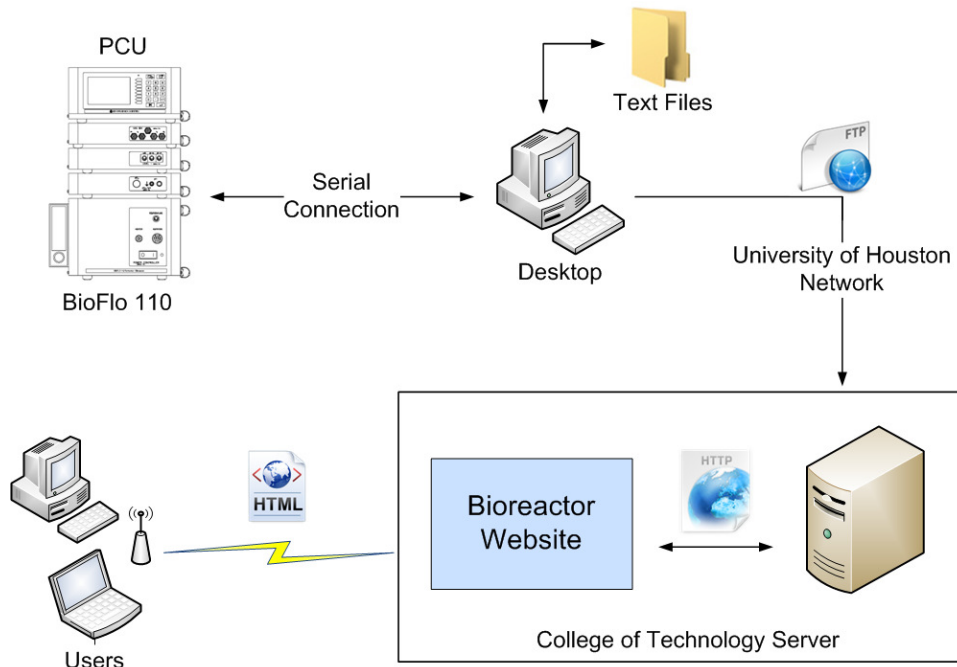


Figure 3: System Network Architecture

### Hardware and Software Components

The hardware added to the pre-existing bioreactor technology includes a desktop computer and a web server provided by College of Technology. The desktop computer runs the main communication program and stores the bioreactor data locally on its hard drive. It connects to the PCU via a RS-232 serial cable through conversion of the manufacturer's proprietary AFS/ModBus 25-pin connector. There are several serial ports monitoring software platforms available to fully examine the data across the serial interface. The port monitoring program, 'Hercules 3.2.3', was chosen for this research because it is open source and provides an easy to use environment for testing multiple PCU request commands separately. This program was used to ensure the command messages sent to the bioreactor are in the right format and the messages received by the desktop are complete.

Table 1 lists the commands that are used on the serial port in order to communicate with bioreactors. The request format consists of four hexadecimal values. The first value represents the unique ID number pre-assigned to each bioreactor. The following two values define the request commands. The last value contains a carriage return indicating the end of each request. The ID numbers for the three bioreactors are 00, 04, and 88 respectively, preset by the manufacturer. The responses from the six commands represent the bioreactor information displayed on the PCU screen.

Table 1: BioFlo Serial Commands

<b>Request Command</b>	<b>Request Format</b>
Get Loop Names	(ID#) (R) (A) (CR)
Get Current Value	(ID#) (R) (C) (CR)
Get Set Point	(ID#) (R) (D) (CR)
Get Output %	(ID#) (R) (E) (CR)
Get Control Mode	(ID#) (R) (J) (CR)
Get Unit	(ID#) (R) (L) (CR)

One of the main objectives of this paper is to implement a web-based access system that adds remote monitoring capability to the parameters associated with the bioreactors. In order to employ this functionality, the desktop located within the laboratory updates and transfers the locally stored files to the remote web server. During the bioreactor experiments, every time the data is captured onsite it is stored, formatted, and sent to the server. The Secure Shell File Transfer Protocol (SFTP) is employed to ensure communication between the desktop and webserver is protected. SFTP is the main protocol used to transfer files via encrypted messages between two external devices. The free and open-source software Windows Secure Copy, or WinSCP, is used due to the operating system and financial constraints of the project. WinSCP includes SFTP capabilities to provide a flexible environment whereby a remote file on a corresponding device can be accessed on a local machine [3]. Each data transfer session requires a host name, port number, username, password, and a secure private key file. The software communicates over port 22, the default port for SFTP. The additional input settings were provided by the University of Houston IT department and are assigned to the remote web server. WinSCP offers programmers to use a command line interface, in addition to providing a simple graphical interface. Input commands prompt the main program on the desktop to automate the file transfer process.

A web server is typically a physical computer or virtual machine that provides clients with the content of a web page. The primary protocol used in this process, HTTP (Hypertext Transfer Protocol), is used to bridge communications between the browser and the server. When a client sends a request via HTTP, it will invoke the web server, which processes and then returns the requested HTML content to the client. Early servers were only able to provide information by implementing static HTML pages. The current state of web applications centers on delivering users dynamic content through database queries and executable scripts.

Students and instructors can view the bioreactors parameters by accessing the bioreactor website. Drupal, a free and open-source content management system is used to develop the web-based GUI and deliver the website content to the client in a user-friendly manner [4]. For security purposes the website will be built and tested on a local host at the University of

Houston. Because of Drupal's modularity, the system can be easily ported from the local host to a remote domain provided by the IT department.

The following section describes the new bioreactor application developed within this paper built from the hardware and software explained above.

### **New Bioreactor Application**

The BioFlo program follows a simple and reliable algorithm in order to provide the necessary functions to communicate with the PCU and send or receive data on the serial port. Developing a well-planned algorithm in the designing phase of the program is critical to guarantee reliability of the application's logic. The new bioreactor program is written in C# and is responsible for storing and converting the acquired data from the bioreactor experiments. After the bioreactor experiment has begun, the main program is started and runs simultaneously alongside the bioreactor experiments, archiving the appropriate parameters every 15 minutes. This time interval is chosen because it reduces the transmission load while keeping the data accurate for further analysis. The flowchart for this program is shown in Figure 4, whilst the algorithm and steps required to capture the data in C# are listed below.

1. Check the serial port
2. If not in use, open the port and initialize the communication settings
3. Write the appropriate commands to the serial port (using commands from Table 1)
4. Read the serial buffer
5. Store the data in a text file
6. Repeat step 3 and 5 for every command
7. Time stamp the text file and save it
8. Convert the text file into a file transfer format
9. Use WinSCP commands to transfer the bioreactor files to the web server
10. Wait for 15 minutes
11. Repeat steps 3-11

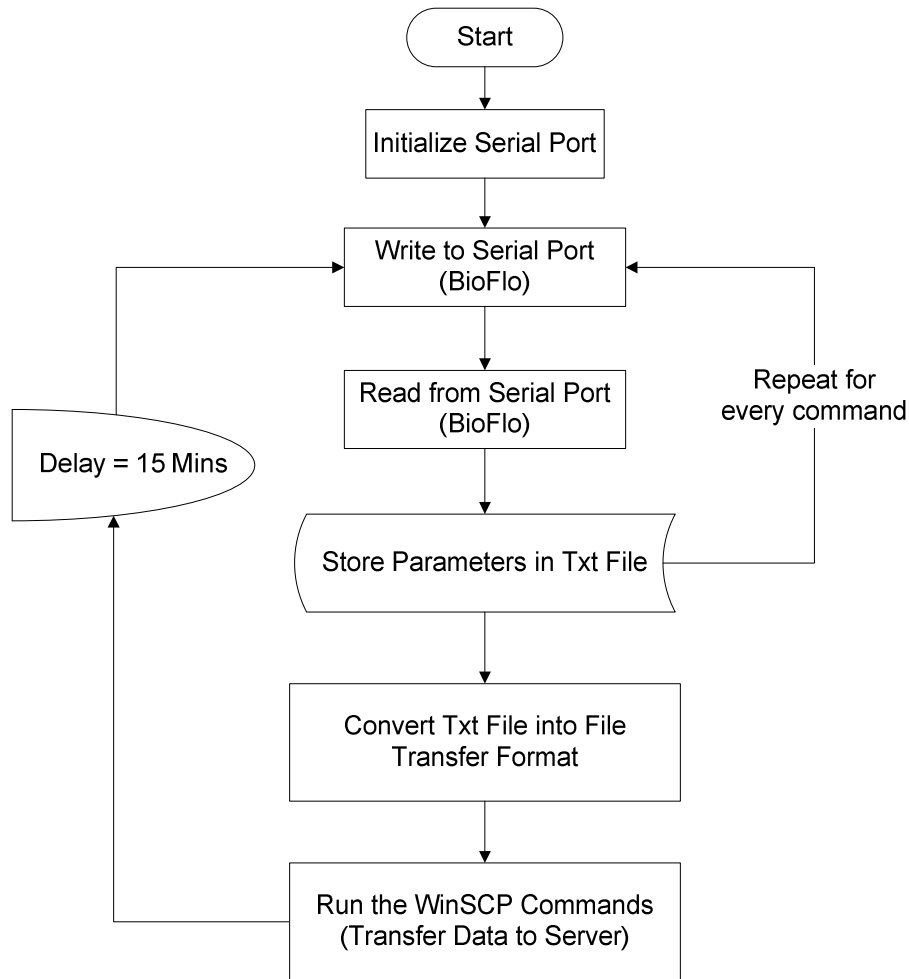


Figure 4: Bioreactor Application Flowchart

There are several ways to achieve code-level communication between the desktop and the PCU. This program uses a controller module called SerialPort, which was originally launched by Microsoft Visual Studio 2005, and is a controller based on the method of P/Invoke call [5]. In order to communicate with the serial port, the program uses the code in Figure 5 to open the port and set the communication parameters.

```

serialPort1.PortName = "COM1";
serialPort1.BaudRate = 9600;
serialPort1.Parity = Parity.None;
serialPort1.StopBits = StopBits.One;
serialPort1.Open();
  
```

Figure 5: Serial Port Initialization Code (C#)

These standard RS-232 settings are defined in the BioFlo 110 manual. After initializing the serial port settings, main request commands are formatted for the bioreactors. The example shown in Figure 6 sends the RC command to ID# 88 and returns all the current values of parameters from the third bioreactor to the serial port buffer. Similarly other messages in Table 1 are communicated through the serial port.

```
byte[] command = new byte[] { 0x88, 0x52, 0x45, 0x0D };
serialPort1.Write(c, 0, command.Length);
```

Figure 6: Example of the Bioreactor Command Code

Another function shown in Figure 7 included in the serial port library named, “Data Received Event Handler”, will read all the existing bytes arriving at the serial port. Upon reading the response from each bioreactor, the information is saved using a string variable called “data”. The following piece of code shows how this function is setup within the program.

```
mySerialPort.DataReceived += new
SerialDataReceivedEventHandler(DataReceivedHandler);
string data = mySerialPort.ReadExisting();
```

Figure 7: Data Receive Handler Function

Each time the data is received, it is appended to a simple text file and converted to a unique format shown in Figure 8. Each set of messages are converted to this new format using “|” as the uniform character separating each field in the response messages. Upon completion of message formatting, the full sets of messages are transferred to web server to update the bioreactor web site. The same text arrangement is implemented on the server side to provide both end devices with a unique and pre-defined format.

```
Loop|Temp|Agit|PumpA|PumpB|PumpC|pH|dO2|Gas|O2
Main Unit|DegC|rpm|%%|pH|SLPM|
Control|Auto|dO2|Off|Off|Off|Auto|Auto|dO2|Auto|
Cur:value|29.977|200.03|0.0000|0.0000|0.0000|7.0093|114.61|3.0138|0.0000|
OP Points|30.000|200.00|100.00|20.000|50.000|7.0000|100.00|3.0000|0.0000|
putput%|9.0256|25.872|0.0000|0.0000|0.0000|0.0000|0.0000|13.151|0.0000|
```

Figure 8: File Transfer Format

The script shown in Figure 9 runs simultaneously with each data capture loop on the main program to transmit the formatted files across the University of Houston network. The WinSCP library should be included within the code to enable SFTP functions. WinSCP.com is the program executed to write the communication commands on the terminal. After setting the initial settings for WinSCP program, the C# application connects to the server named [btech@tech.uh.edu](mailto:btech@tech.uh.edu) which is setup and dedicated at College of Technology for this project. Each file is sent to the server using the “put” command, and for security purposes, each



session is terminated to finish the process. This process will be repeated every time the main program captures new sets of data. The implementation of the transferred data on the server side is explained in the next section.

```
// Run hidden WinSCP process and set the parameters
Process winscp = new Process();
winscp.StartInfo.FileName = @"C:\Program Files\WinSCP\WinSCP.com";
winscp.StartInfo.UseShellExecute = false;
winscp.StartInfo.RedirectStandardInput = true;
winscp.StartInfo.RedirectStandardOutput = true;
winscp.StartInfo.CreateNoWindow = true;
winscp.Start();

// Feed in the scripting commands
winscp.StandardInput.WriteLine("option batch abort");
winscp.StandardInput.WriteLine("option confirm off");

// Connect to the server and specify the remote directory
winscp.StandardInput.WriteLine("open bteclab@tech.uh.edu");
winscp.StandardInput.WriteLine("cd /home/cot_sites/bteclab/htdocs");

// Send each bioflo file seperatly using put command
winscp.StandardInput.WriteLine("put BioFlo.A.txt");
winscp.StandardInput.WriteLine("put BioFlo.B.txt");
winscp.StandardInput.WriteLine("put BioFlo.C.txt");
winscp.StandardInput.Close();

// Exit the program
winscp.WaitForExit();
```

Figure 9: WinSCP Transfer Script Code

### Bioreactor Web site

The bioreactor website is updated by a web server while the program is still running. Since the bioreactors experiments may take up to three days to complete so it is important to access and monitor the data outside of the laboratory. The dedicated bioreactor website can be accessed using the following URL: <http://tech.uh.edu/bteclab/>. The initial webpage developed for bioreactors is shown in Figure 10.

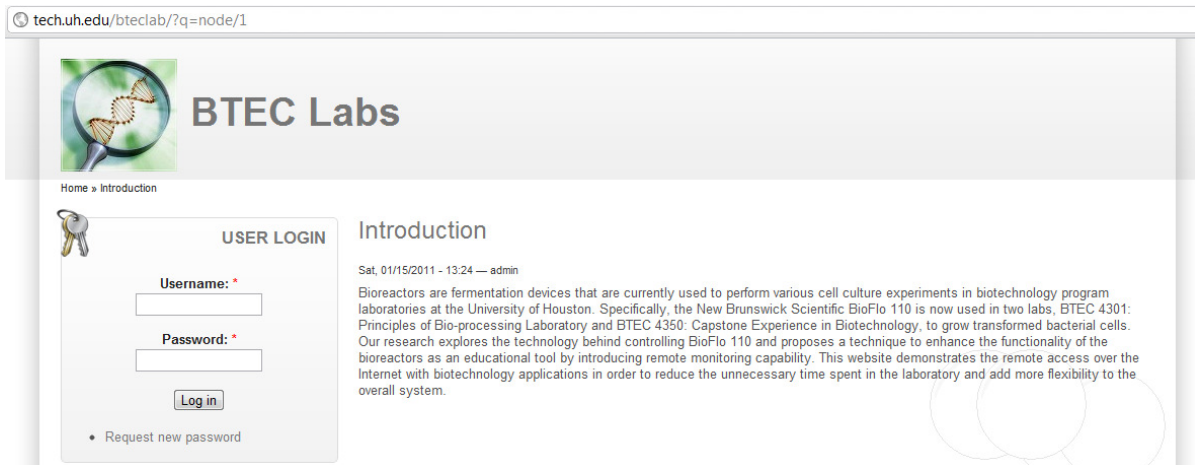


Figure 10: Login Web Page

The website is hosted on a College of Technology web server and is maintained using Drupal as the content management framework. Drupal provides the website administrator with a powerful and flexible environment to perform different tasks through available modules. The design and layout also allows users to easily navigate and search through the website. Users are created by the administrator and must authenticate at a login page before gaining access to the web pages. After providing a username and password at login, the user can access the three bioreactors' web pages via links within the "Live View" menu shown in Figure 11. Two roles are defined in the Drupal system: Lab Instructor and Student. Each role can be modified and customized in order to give various permissions to each account. Student and lab instructors can freely access and view the information about their experiments. Additionally the lab instructor may add comments or post new web contents.

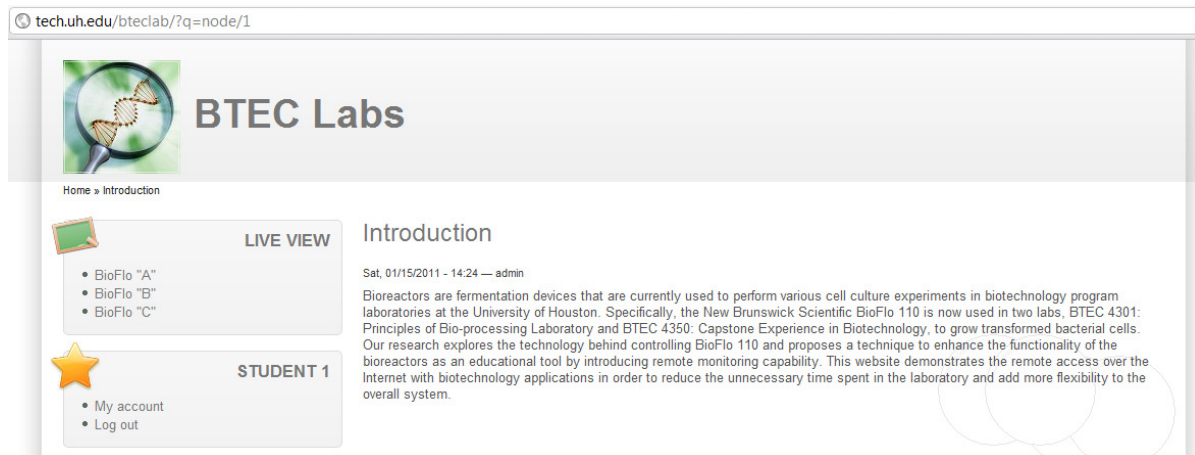


Figure 11: Initial Introduction Web Page

The dedicated bioreactor pages are designed to produce dynamic web content and provide the users with live experimental data. The example in Figure 12 shows the experiment parameters corresponding to the first bioreactor, BioFlo A. The time on the top of the page indicates actual time of the system, and the refresh button at the bottom can be used to retrieve the new table if the program in the laboratory has updated the web page.

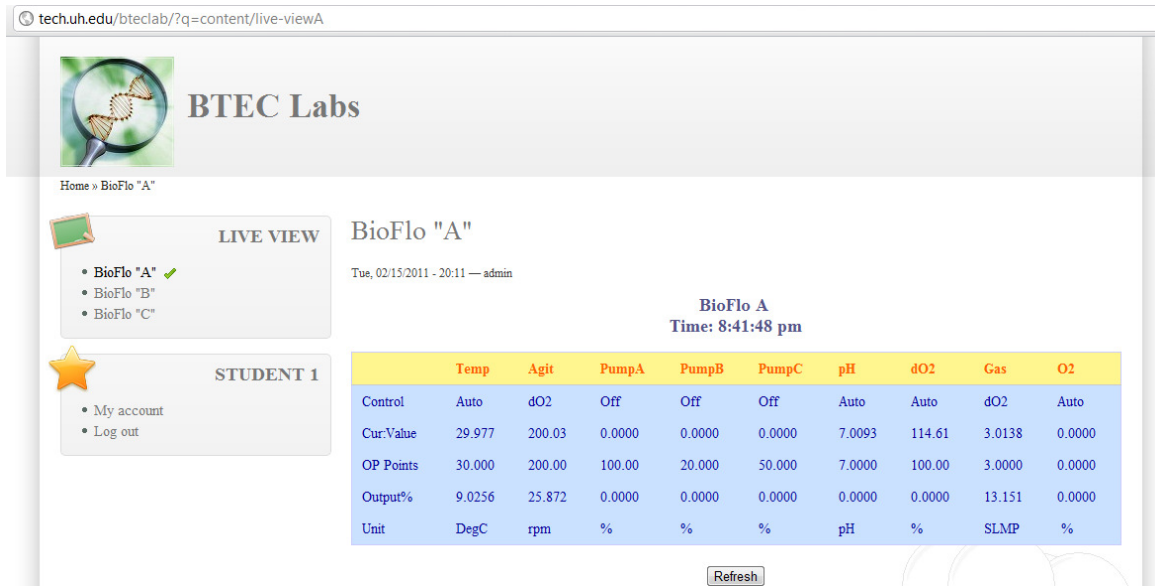


Figure 12: Bioreactor Live View Example

The web pages are created using standard HTML coding schemes combined with PHP scripts [6]. The PHP script is employed within the HTML code to provide the user with a live view of each bioreactor's parameters in the dedicated table. The PHP code presented in Figure 13 accesses the files originating from the desktop in laboratory to update each page. After retrieving the information from the text files, basic table tags and commands are used to produce the table shown in Figure 12.

Providing students and instructors with remote monitoring through the bioreactor web site reduces the unnecessary time spent in the laboratory and assures the experiment is running properly without onsite supervision. In case of any error, the logged data on the desktop can be used to identify and resolve any issues with the bioreactor run.

```

<?php // Start PHP script
$fp = fopen('sites/default/files/Bioflo.A.txt','r');// open the file for A
if (!$fp) {echo 'ERROR: Unable to open file.</table></body></html>'; exit;}
$loop = 0; //initialize the loop

while (!feof($fp)) {
    $loop++;
    $line = fgets($fp,1024); //Read one line
    $field[$loop] = explode ('|', $line); // use "|" as the seperator
    echo '
<tr> // create the rows for the table using the text file
<td>.$field[$loop][0].</td>
<td>.$field[$loop][1].</td>
<td>.$field[$loop][2].</td>
<td>.$field[$loop][3].</td>
<td>.$field[$loop][4].</td>
<td>.$field[$loop][5].</td>
<td>.$field[$loop][6].</td>
<td>.$field[$loop][7].</td>
<td>.$field[$loop][8].</td>
<td>.$field[$loop][9].</td>
</tr>';
    $fp++;
}
fclose($fp); ?> // End of PHP code

```

Figure 13: PHP Update Script Code

## Conclusion

Bio-processing and growing cell cultures require both sensitive and accurate instruments, as well as a tightly controlled environment. An essential component of achieving both viable and reproducible results requires the tracking and archiving of all the parameters and procedures necessary to duplicate the results accurately and increase the yield of cell product. The program introduced in this paper allows students and instructors to view and monitor the necessary data from the BioFlo 110 lab remotely, offering a better understanding of the fermentation process, increasing productivity, efficacy, and allowing for more efficient troubleshooting. This program also enables lab personnel to perform experiments overnight while maintaining access over the Internet to monitor the bioreactors' performance. The flexibility introduced by the system will increase productivity of lab managers. The remote monitoring system invokes readily available communication technologies which greatly improves the data analysis and study of bioreactor experiments.

## References

- [1] "BioFlo 110 Modular Benchtop Fermentor: Guide to Operations." New Jersey: New Brunswick Scientific Co., Inc., 2007, pp. 1,139-141.
- [2] W. L. Hochfeld. (2006). *Producing Biomolecular Substances with Fermenters, Bioreactors and Biomolecular Synthesizers*. Available: <http://EV7SU4GN4P.search.serialssolutions.com/?V=1.0&L=EV7SU4GN4P&S=JCs&C=TC0000228257&T=marc>
- [3] X. Liu, *et al.*, "Design of secure FTP system," in *Communications, Circuits and Systems (ICCCAS), 2010 International Conference on*, 2010, pp. 270-273.
- [4] J. Fu, *et al.*, "A Multi-sites Scheme Based on Open Source CMS, Drupal," in *Multimedia and Information Technology (MMIT), 2010 Second International Conference on*, 2010, pp. 239-241.
- [5] Z. Yue-Qin and G. Wen, "- Design and Implementation for Communicating between Computer Serial Port and Mobile Phone," vol. -, pp. - 186, 2009.
- [6] T. Suzumura, *et al.*, "Performance Comparison of Web Service Engines in PHP, Java and C," in *Web Services, 2008. ICWS '08. IEEE International Conference on*, 2008, pp. 385-392.

## Biography

ALI GIVMANESH is a graduate student at University of Houston. He is pursuing a degree in Engineering Technology at the college of technology. He was involved in the IEEE student organization in his undergraduate program of Computer Engineering and graduated valedictorian of the Computer Engineering Technology program in 2008, Summa Cum Laude. His objective for his graduate thesis has been to integrate academic study and network communication solutions to enhance bio-processing equipments.

RUPA IYER, Ph.D., is an Associate Professor in the department of Engineering Technology, in the College of Technology at the University of Houston. She is the founding director of Biotechnology programs, and also directs the Center for Life Sciences Technology. In this capacity she has been responsible for developing the Biotechnology degree program and the core initiatives of the center that include, education, research workforce development and outreach. Her research interests are in environmental biotechnology and interdisciplinary research-based education.

DRISS BENHADDOU, Ph.D., is an Associate Professor with the University of Houston, Texas, where he is actively involved in optical networking and sensor networks research activities. He developed state of the art wireless and optical networking research lab at the engineering technology department ([www.tech.uh.edu/won](http://www.tech.uh.edu/won)). Dr. Benhaddou was a senior technical staff member at Lambda Optical Systems Inc, where he played a key role in protocol development and systems integration activities. During his earlier tenure at Sprint, he implemented an extensive broadband test-bed for vendor equipment certification and

research/development activities. He holds two doctoral degrees in optoelectronics and telecommunication engineering from the University of Montpellier II, France, in 1995, and the University of Missouri in 2002.